

“IZMS” Electromagnetic Flowmeter

Introduction

The IZMS series electromagnetic flowmeter is the ideal choice for conductive fluids and slurries. Measurement accuracy is unaffected by product viscosity, density, temperature, and the presence of suspended particulates and solids. Unique signal processing methods developed from years of experience in the food and dairy industry allows this flowmeter to provide exceptional accuracy and immunity against process and environmental variables.

Designed for simple installation and start up, the IZMS features automatic flow ranging and user friendly parameterization. Offered in a 2-piece design as standard gives the meter optimal performance and longevity in hot, humid process environments typically found in the food and dairy processing industry.

For more information on this flowmeter, or any of our Anderson-Negele products, visit www.anderson-negele.com or call our Customer Service Department directly at 1-800-833-0081.



Authorizations



Features

- Designed specifically for the food/ beverage and dairy industries yielding proven, unsurpassed accuracy and reliability
- Standard two-piece design provides:
 - practical, easily accessible locations for operator display
 - protection for electronics from harsh operating environments
- Meets all USDA standards
- 3-A compliant

Applications

- Beer
- Beverage Concentrates
- Brine
- Catsup
- CIP Solution
- Milk
- Cream
- Juices
- Molasses
- Yogurt
- Peanut Butter
- Sauces

Specifications

FLOW TUBE

Connections: Sanitary Tri-Clamp®
 Construction:
 Housing: 304 SS
 Lining: PFA
 Electrodes: 316L SS
 Connection Box: 304 SS

Wiring Connections: water tight cord grip and 1/2" NPT
 NPT SS conduit adapter sets
 supplied with each flow tube

Maximum
 Product Temp: 325°F / 163°C
 Maximum
 Inlet Pressure: 145 psi abs. / 11 bar abs.
 Minimum
 Inlet Pressure: 1.4 psi / .1 bar abs.
 Minimum
 Fluid Conductivity: 5 µS / cm
 Magnetic Field: DC pulsed with self-adapting
 adjustment

CONVERTER

Power Requirements: Field selectable (by jumpers)
 115VAC/50-60 Hz/single phase
 230VAC/50-60 Hz/single phase
 10-30VDC available
 15VA (15 Watts)
 Fuse Protection: 315mA slow response 5x20mm
 Scaled Digital Outputs: Two (2) independent, scalable
 pulsed outputs Open collector 30V@80mA
 Opto-isolated
 Scaling Factors: From 0.00001 to 10,000 pulses
 per volumetric unit
 Output Pulse
 (Frequency & Width): Standard Configuration:
 1:1 pulse to pause ratio, 1000 Hz Max.
 Adjustable: 1-60,000msec, 1000 Hz Max.
 Fixed: 50 micro sec pulse width, 1000 Hz
 Max.


Output Pulse Config: Selectable from following:
 2 independent
 2 channel by 90° shift
 2 channel by 180° shift
 3 channel by 120° shift
 1 forward flow, 1 reverse flow
 Output Control Signal: Open collector 30V@80mA
 Selectable from following:
 forward flow - error signal
 Analog Output: 4-20mA or 0-20mA selectable
 Adjustable averaging 0.1 to 10 sec
 Adjustable damping 0 to 60 sec
 Max. resistive load 500 ohms
 Discrete Inputs: Suspended Operation - coil power
 supply off
 Remote reset internal totalizer with error
 reset
 Opto-isolated
 10-30V input from 3k Ohm internal resistor
 1msec min. pulse width with adjustable
 debounce
 LED Indicators: Pulse Output 1; Pulse Output 2;
 Forward Flow; Error Condition
 Rezero Feature: Pushbutton for automatic hydraulic re-
 zero of flow tube during field installation
 Serial Comm: RS485 serial interface
 Control System Bus protocol, 57,600 Baud
 Integral Display
 (D option) and Keypad: 2-line, 20 digit alphanumeric backlit
 LCD display. 25 key membrane keypad
 Interconnecting Cable: 25ft. supplied as standard with factory
 prepared ends.
 Operating Temp: -4°F to 140°F (-20°C to 60°C)
 Converter Construction: Cast aluminum with SGBL corrosion-
 resistant coating
 Entry Wiring
 Connections: Water tight cord grip and 1/2"
 female SS NPT conduit adapter sets
 supplied with each converter
 Sealing Screws: Supplied with (2) stainless steel screws
 on both terminal and converter enclosure
 for a sealing wire and seal for protection
 against alterations.

Flow Ranges

Connection Size	Total Operational Range	Metering accuracy at rate	
		inches	gallons per minute
1	.26 - 88	>.26 gpm	>1.0 gpm
1 ½	.44 - 132	>.44 gpm	>1.8 gpm
2	.88 - 286	>.88 gpm	>3.5 gpm
2 ½	1.8 - 440	>1.8 gpm	>6.2 gpm
3	2.6 - 880	>2.6 gpm	>10.8 gpm
4	6.6 - 1761	>6.6 gpm	>26.4 gpm

Dimensions

Model	Sanitary Connection Size	Dimensions							Approx. Wt.
		D	H	L1	L2				
					Standard	Option 1	Option 2	Option 3	
025	1"	3.54"	7.91"	4.09"	13.25"	9.88"	8.00"	-	14.6 lbs.
032	1 1/2"	4.13"	8.50"	4.09"	13.25"	9.88"	8.00"	-	17.0 lbs.
050	2"	5.12"	9.49"	4.09"	13.25"	9.88"	8.00"	-	19.8 lbs.
065	2 1/2"	5.12"	9.49"	6.30"	13.25"	9.88"	9.00"	-	25.3 lbs.
080	3"	6.10"	10.47"	6.30"	13.25"	9.88"	9.88"	-	37.4 lbs.
100	4"	6.69"	11.06"	7.87"	11.67"	-	11.90"	13.67"	50.5 lbs.

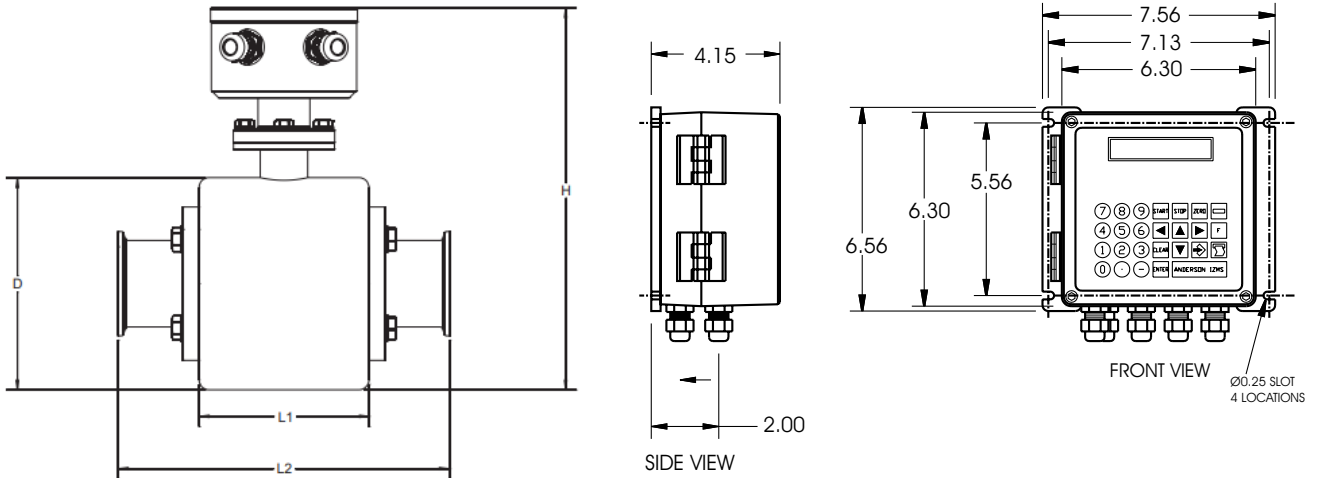

NOTE: All dimensions in inches

Order Information

