

Product Information TFP-47P, -67P, -167P
PHARMA

Temperature Sensor Tri-Clamp

Application/Specified usage

- Temperature Measurement in vessels and pipes

Application examples

- Monitoring of CIP-/SIP-process
- Process monitoring

Hygienic design/Process connection

- Tri-Clamp sealing system without adapter
- Product contacting materials compliant to FDA
- Sensor completely made of stainless steel
- Conforming to 3-A Sanitary Standard 74-06

Features/Advantages

- Direct Connection without adapter
- Integrated transmitter optional
- Different electrical connections available
- Material 1.4435, inspection certificate 3.1 in scope of delivery (for product contacting parts)
- $R_a < 0.4 \mu\text{m}$ or $0.6 \mu\text{m}$ (on request)

Options/Accessories

- 2 x Pt100 (not retrofittable)
- 2 x Pt100 with two transmitters (not retrofittable)
- Pt100 chip with other classes of accuracy (1/3B, 1/10B)
- Programmable transmitters with output 4...20 mA, 2-wire
- Programming adapter MPU-P 9701
- Integrated transmitter for HART-protocol
- Integrated transmitter MPU-LCD with display in connecting head
- Fast response sensor tip 3 mm and 4 mm
- Pre-assembled connecting cable in other lengths and other material

Temperature sensor TFP-47P


Temperature Transmitter MPU-LCD with Display

Application / Specified Usage

- 4...20 mA transmitter with LCD for Pt100 temperature sensor
- For installation in temperature sensor
- Sensor monitoring

Features

- 4-digit display with green backlight
- Temperature measurement in °C and °F
- Easy range select by one button
- Lower costs for wiring because of 2-wire technology

Note

See product information „MPU-LCD“ for details.


**Option MPU-LCD
(display in the connection head)**



Temperature sensor		
Process connection		Tri-Clamp
Materials	connecting head thermowell and Tri-Clamp	stainless steel 1.4301 (AISI 304) stainless steel 1.4435 (AISI 316L)
Surface quality		$R_a \leq 0.8 \mu\text{m}$
Insertion length EL		20...500 mm in steps of 5 mm
Operating pressure		10 bar maximum
Temperature ranges	ambient process CIP / SIP	-50...+80 °C -50...+250 °C 150 °C max. for 120 minutes (with transmitter)
Sensing resistor	acc. to DIN EN 60751	Pt100
Electrical connection	cable gland cable connection	M16 x 1.5 M12-plug 1.4301 (AISI 304), 4-pins
Protection class	cable gland cable connection	IP 67 IP 69 K

Transmitter MPU-4, MPU-H, MPU-M		
Temperature ranges	ambient storage	-40...+85 °C -55...+90 °C
Measuring ranges	MPU-4, MPU-H, MPU-M	standard: -10...40 °C, 0...50 / 100 / 150 / 200 °C special ranges free programmable
Accuracy	input	$< \pm 0.25 \text{ °C}$
Temperature drift	zero, span	$< 0.01 \% / \text{K}$
Supply	MPU-4, MPU-H, MPU-M accuracy	8...35 V DC 0.01 % / V (reference: 12 V DC)
Output	signal accuracy burden	analog 4...20 mA $< \pm 0.1 \%$ of measurement range $< 600 \Omega$ (at $U_B = 24 \text{ V}$)
Humidity	without condensation	0...98 %


Accuracy classes of temperature sensors Tolerances for Pt100 acc. to DIN EN 60751			
Pt100	A	1/3 B	1/10 B
0 °C / 100 Ω	$\pm 0.15 \text{ K} / \pm 0.06 \Omega$	$\pm 0.10 \text{ K} / \pm 0.04 \Omega$	$\pm 0.03 \text{ K} / \pm 0.01 \Omega$
100 °C / 138.5 Ω	$\pm 0.35 \text{ K} / \pm 0.13 \Omega$	$\pm 0.27 \text{ K} / \pm 0.10 \Omega$	$\pm 0.08 \text{ K} / \pm 0.03 \Omega$

Electrical connection without transmitter

With 1 x M12 plug




Configuration 1st M12 plug



Electrical connection with transmitter


With M12 plug




Configuration M12 plug

- 1: +supply
- 2: -supply 4...20 mA
- 3: not connected
- 4: not connected


With 2 x M12 plug




Configuration 2nd M12 plug




With cable gland

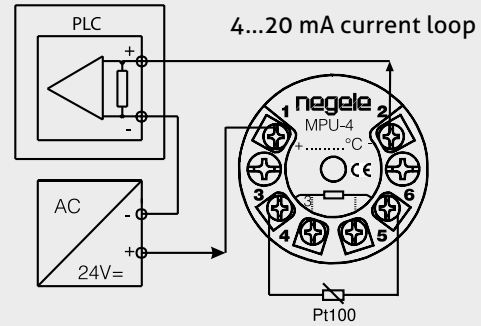

With cable gland




Configuration strip terminal



- clamps for 1st Pt100
- clamps for 2nd Pt100 (at version 2 x Pt100)

Electrical connection with two transmitter (TFP-67P)


With 1 x M12-plug (sensor 1 + sensor 2)



Configuration M12-plug

- 1: +supply (sensor 1)
- 2: -supply 4...20 mA (sensor 1)
- 3: -supply 4...20 mA (sensor 2)
- 4: +supply (sensor 2)


With 2 x M12-plug (sensor 1)



Configuration M12-plug

- 1: +supply (sensor 1)
- 2: -supply 4...20 mA (sensor 1)
- 3: not connected
- 4: not connected


With 2 x M12-plug (sensor 2)




Configuration M12-plug

- 1: +supply (sensor 2)
- 2: -supply 4...20 mA (sensor 2)
- 3: not connected
- 4: not connected


TFP-47P | TFP-47P.2

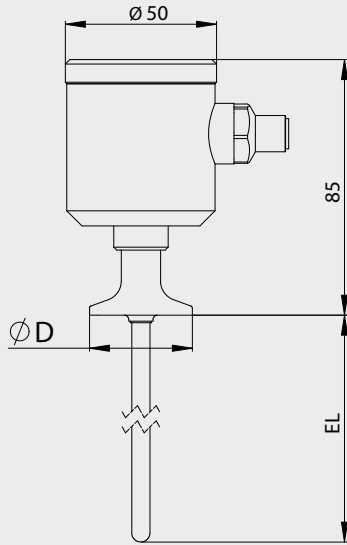


TFP-67P

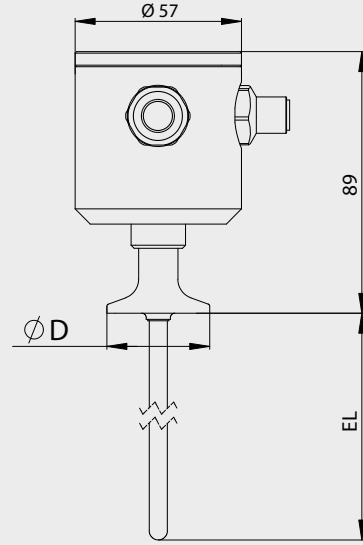

TFP-167P

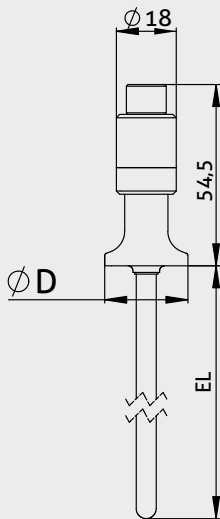

TFP-167P / ... / MPU-M

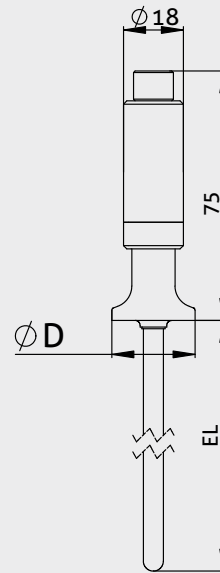

Dimension table Tri-Clamp


Type	Order code	Clamp size D [mm]	Suitable for pipe diameter	Pipe style
C25	TFP-.../C25	25.0	DN 6...8 ISO 6...10 1/4", 3/8", 1/2", 3/4"	DIN 11866 series A DIN 11866 series B / ISO 1127 DIN 11866 series C
C34	TFP-.../C34	34.0	DN 10...20	DIN 11866 series A
C50	TFP-.../C50	50.5	DN 25...40 ISO 15...25 1" + 1½"	DIN 11866 series A DIN 11866 series B / ISO 1127 DIN 11866 series C
C64	TFP-.../C64	64.0	DN 50 2"	DIN 11866 series A DIN 11866 series C
C77	TFP-.../C77	77.5	2½"	DIN 11866 series C
C91	TFP-.../C91	91.0	DN 65 3"	DIN 11866 series A DIN 11866 series C

Sensor tip diameter and response time

All temperature sensors are available with smaller sensor tips, to ensure a shorter response time. The below-mentioned times were measured by emerging a temperature sensor from room temperature into boiling water.


Sensor tip Ø 6 mm

50 %-time: $t_{50} \leq 3.0$ s
90 %-time: $t_{90} \leq 8.0$ s

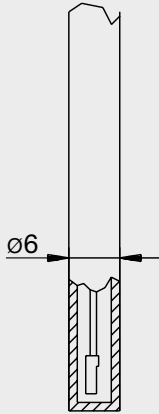


Sensor tip Ø 4 mm

50 %-time: $t_{50} \leq 2.4$ s
90 %-time: $t_{90} \leq 6.5$ s

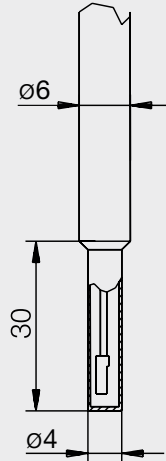

Sensor tip Ø 3 mm

50 %-time: $t_{50} \leq 0.5$ s
90 %-time: $t_{90} \leq 1.5$ s

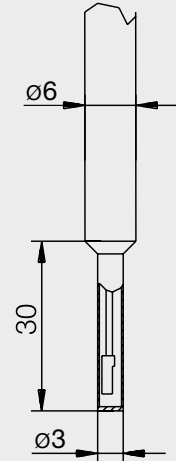

Accessories | Spare parts

Diameter pipe		Clamp size D [mm] (see page 4)	 	
DIN 11866 series A	DIN 11866 series C		Clamp ring Tri-Clamp	Sealing ring Tri-Clamp
DN10		34.0	SRC-10	DRC-10
DN15		34.0	SRC-10	DRC-15
DN20		34.0	SRC-10	DRC-20
DN25		50.5	SRC-25	DRC-25
DN32		50.5	SRC-25	DRC-32
DN40		50.5	SRC-25	DRC-40
DN50		64.0	SRC-50	DRC-50
DN65		9.0	SRC-65	DRC-65
	1/2"	25.0	SRC-5	DRC-1/2"
	3/4"	25.0	SRC-5	DRC-3/4"
	1"	50.5	SRC-25	DRC-1"
	2"	64.0	SRC-50	DRC-50
	2½"	77.5	SRC-2½"	DRC-2½"
	3"	91.0	SRC-65	DRC-65

Accessories

PVC-cable with M12-connection made of 1.4305, IP 69 K, unshielded
M12-PVC / 4-5 m PVC-cable 4-pin, length 5 m
M12-PVC / 4-10 m PVC-cable 4-pin, length 10 m
M12-PVC / 4-25 m PVC-cable 4-pin, length 25 m

PVC-cable with M12-connection, brass nickel-plated, IP 67, shielded
M12-PVC / 4G-5 m PVC-cable 4-pin, length 5 m
M12-PVC / 4G-10 m PVC-cable 4-pin, length 10 m
M12-PVC / 4G-25 m PVC-cable 4-pin, length 25 m

Programming adapter MPU-P 9701

Programming adapter for MPU-4, MPU-H and MPU-M

PVC-cable with M12-connection



Programming adapter MPU-P 9701



Transport / Storage



- No outdoor storage
- Dry and dust free
- Not exposed to corrosive media
- Protected against solar radiation
- Avoiding mechanical shock and vibration
- Storage temperature -55...+90 °C
- Relative humidity maximum 98 %

Cleaning / Maintenance



- In case of using pressure washers, don't point nozzle directly to electrical connections!

Reshipment



- Sensors shall be clean and free of media or heat-conductive paste and must not be contaminated with dangerous media!
- Use suitable transport packaging only to avoid damage of the equipment!

Note on 3-A Sanitary Standard 74-



Information on installation according to 3-A standard is available on our website:
www.anderson-negele.com/3A74.pdf

Click on the PDF icon to download the document.

Conventional Usage



- Not suitable for applications in explosive areas.
- Not suitable for applications in security-relevant equipments (SIL).

Standards and Guidelines



- You have to comply with applicable regulations and directives.

Note on CE



- Applicable directives: Electromagnetic Compatibility Directive 2014/30/EU
- Compliance with the applicable EU directives is identified by the CE label on the product.
- The operating company is responsible for complying with the guidelines applicable to the entire installation.

Disposal



- Electrical devices should not be disposed of with household trash. They must be recycled in accordance with national laws and regulations.
- Take the device directly to a specialized recycling company and do not use municipal collection points.

Order code for version with 1 x Pt100

TFP-47P (connecting head Ø 50 mm)
TFP-167P (connecting head Ø 18 mm, electrical connection via M12-plug)

Sensor length EL in mm (in steps of 5 mm)**020...250**

xxx (special length)

Diameter thermowell in mm

6

8

Diameter sensor tip in mm**X** (no reduction)**3** (only for thermowell 6 mm)**4** (only for thermowell 6 mm and 8 mm)**6** (only for thermowell 8 mm)**Accuracy class Pt100****A****1/3B****1/10B****Electrical connection (not selectable for TFP-167P)****M12** (M12-plug, standard with MPU-LCD)**Transmitter****X** (without)**for TFP-47P****MPU-4** (programmable)**MPU-H** (HART-protocol)**MPU-LCD** (with display)**for TFP-167P****MPU-M** (programmable)**Measuring range MPU****(only for types with transmitter; not for MPU-LCD)****-10...40** (measuring range -10...40 °C)**0...50** (measuring range 0...+50 °C)**0...100** (measuring range 0...+100 °C)**0...150** (measuring range 0...+150 °C)**0...200** (measuring range 0...+200 °C)**xx...yy** (special range)**Tri-Clamp Size****C25** (pipe diameter:**C34** (A see "Dimension table**C50** (A Tri-Clamp" on page 4)**C64** (A)**C77** (A)**C91** (A)

TFP-47P/ 100/ 6/ X/ A/ M12/ MPU-4/ 0...100/ C25

Order code for version with 2 x Pt100

TFP-47P.2 (connecting head Ø 50 mm, 2 x Pt100, no transmitter possible)
TFP-67P (high connecting head Ø 57 mm, 2 x Pt100, prepared for 2 x transmitter)

Sensor length EL in mm (in steps of 5 mm)

020...250

xxx (special length)

Diameter thermowell in mm

6

8

Diameter sensor tip in mm

X (no reduction)

3 (only for thermowell 6 mm)

4 (only for thermowell 6 mm and 8 mm)

6 (only for thermowell 8 mm)

Accuracy class Pt100

A

1/3B

1/10B

Electrical connection (only for TFP-67P)

M12 (M12-plug)

2xM12 (2 x M12-plug)

**Continue it TFP-67P is selected!
 No further options for TFP-47P.2!**

1st Transmitter

MPU-4 (programmable)

Measuring range 1st transmitter

-10...40 (measuring range -10...40 °C)

0...50 (measuring range 0...+50 °C)

0...100 (measuring range 0...+100 °C)

0...150 (measuring range 0...+150 °C)

0...200 (measuring range 0...+200 °C)

xx...yy (special range)

2nd Transmitter

MPU-4 (programmable)

Measuring range 2nd transmitter

-10...40 (range -10...40 °C)

0...50 (range 0...+50 °C)

0...100 (range 0...+100 °C)

0...150 (range 0...+150 °C)

0...200 (range 0...+200 °C)

xx...yy (special range)

Tri-Clamp Size

C25 (pipe diameter:

C34 Ⓐ see "Dimension

C50 Ⓐ table Tri-

C64 Ⓐ Clamp"

C77 Ⓐ on page 4)

C91 Ⓐ

TFP-67P/ 100/ 6/ X/ A/ M12/ MPU-4/ 0...100 / MPU-4/ 0...100/ C25